


DESCRIPTION




Modules measuring 2400x600 mm and 9 mm or 18 mm thick, with the ability to make curves.

Recycled polyester fiber core.

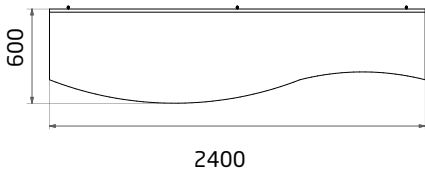

ACOUSTIC TEST

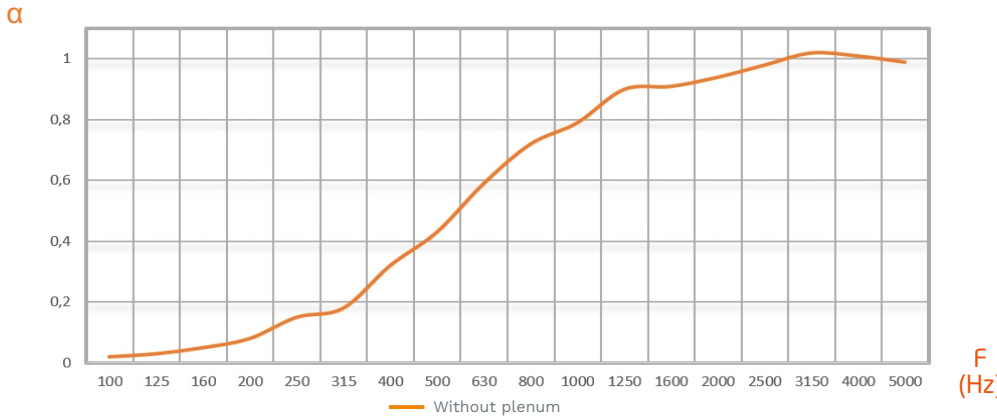

DATA STUDIED

Sizes: 2440x1220 mm

Thickness: 18 mm

Weight: 4 kg/m²

Density:

PET fiber: 220 kg/m³ (+/- 6%)



Test layout without plenum.

*Material with high absorption coefficients at high (H) frequencies.

Medium absorptive coefficient

$\alpha_m = 0.72$

Average absorptive coefficient

$\alpha_w = 0.45$

Noise reduction coefficient

NRC = 0.58

TECHNICAL FEATURES

Sizes	2400x600x9 or 18 mm.
Tolerances	Width: ± 1,5 mm ; Length: ± 1,5 mm.
Waterproof	See properties.
Set sound-absorbing	Recycled polyester fiber core.
Fire-rated	UNE 13501 Polyester fiber: B-s1,d0

*Consult others support material or sizes.

PRODUCT REMARKS

The material must remain at the installation site for a minimum of 24 hours before assembly. Temperatures ideal condition are 18° to 25° and relative humidity of 40% to 60%. The support is a fibrous material, the incidence of light can generate shadows, reliefs and similar effects. It is recommended to leave a 5mm gap between modules.

ADDITIONAL FEATURES

Washable product	Clean with damp cloth. Do not use chemical agents.
Impact resistance	Depending on the support material.
Scratch resistance	Depending on the finishing material.
Dirt proof	Moderate resistance to dirt.
Recyclable	100% recyclable
Anti-seismics	Possibility of installation with anti-seismic system.

SISTEMA INSTALACIÓN ESTÁNDAR

Ceiling
Holding clamp.

