



DESCRIPTION




Modules 9/18 mm thick composed of a recycled polyester fiber core. In rectangular format or circular.

Dimensiones:

- 1200x1200x9 ó 18 mm.
 - 1200x600x9 ó 18 mm.
 - 800x800x9 ó 18 mm.
 - 600x600x9 ó 18 mm.
 - Ø1200x9 ó 18 mm.
 - Ø800x9 ó 18 mm.
 - Ø600x9 ó 18 mm.
- For others, please consult.

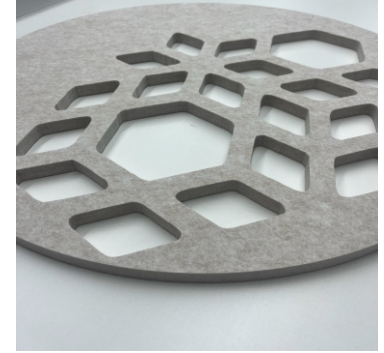

ACOUSTIC TEST

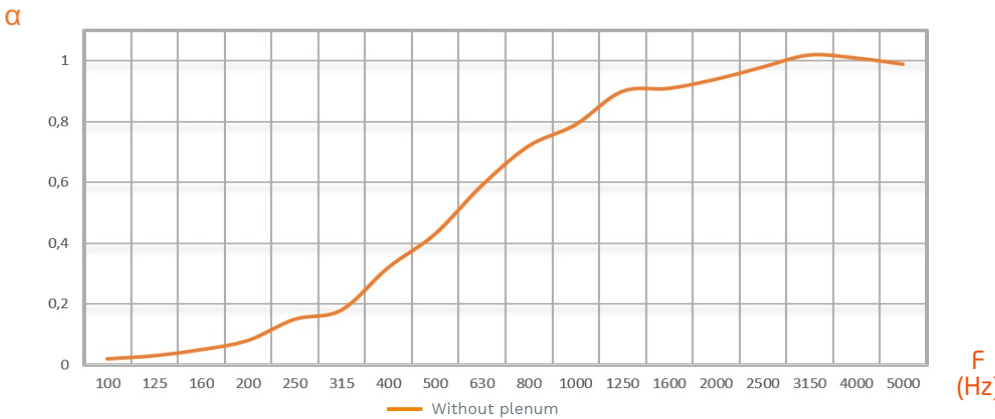

STUDIED DATA

- Sizes:** 2440x1220 mm
- Thickness:** 18 mm
- Weight:** 4 kg/m²
- Density:**
PET fiber: 220 kg/m³ (+/- 6%)



Test layout without plenum.

*Material with high absorption coefficients at high (H) frequencies.

Medium absorptive coefficient

$\alpha_m = 0.72$

Average absorptive coefficient

$\alpha_w = 0.45$

Noise reduction coefficient

NRC = 0.58

TECHNICAL FEATURES

- Sizes** 2400x600x9 o 18 mm.
- Tolerances** Widht: ± 1,5 mm ;
Lenght: ± 1,5 mm.
- Waterproof** See propierties.
- Set sound-absorbing** Recycled polyester fiber core.
- Fire-rated** UNE 13501
Polyester fiber: B-s1,d0

*Consult for other support material or sizes.

PRODUCT REMARKS

The material must remain at the installation site for a minimum of 24 hours before assembly. Temperatures idealcondition are 18° to 25° and relative humidity of 40% to 60%. The support is a fibrous material, the incidence of light can generate shadows, reliefs and similar effects. It is recommended to leave a 5mm gap between modules.

ADDITIONAL FEATURES

- Washable product** Clean with damp cloth. Do not use chemical agents.
- Impact resistance** Depending on the support material.
- Scratch resistance** Depending on the finishing material.
- Dirt proof** Moderate resistance to dirt.
- Recyclable** 100% recyclable
- Anti-sismics** Possibility of installation with anti-seismic system.

INSTALLATION STANDARD SYSTEM

Roofs
 Holding hooks, anchoring to forging and metal cable.

