




**DESCRIPTION**

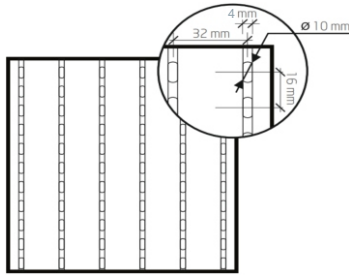


2430x160 mm modules with 16 mm of thickness, slots of 2, 3 or 4 mm separated 32 mm and Ø10 mm perforations in the back.



**FLEX SOLUTION:** radius from 1m. For smaller radius of curvature, contact us.

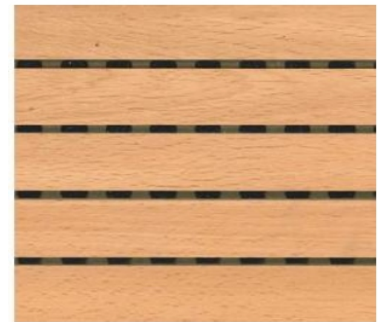

**ACOUSTIC TEST**

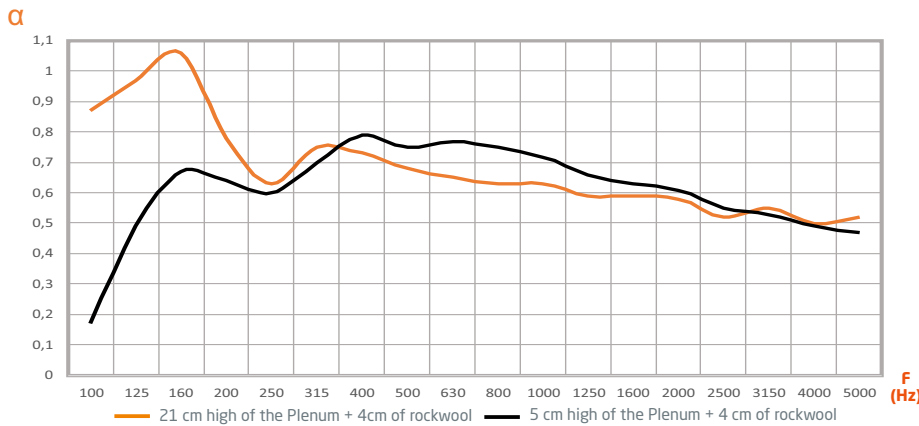

**STUDIED DATA**

- Sizes:** 2430x296 mm
- Thickness:** 16 mm
- Slots:** 4 mm
- Diameter:** 10 mm
- Density:** 750 kg/m<sup>3</sup> (+/-6%)
- Weight:** 10.8 kg/m<sup>2</sup>

\*Weight will depend on the finishing and machining.



Test sample.

Medium absorptive coefficient	$\alpha_m = 0.60$	$\alpha_m = 0.70$
Average absorptive coefficient	$\alpha_w = 0.70$	$\alpha_w = 0.70$
Noise reduction coefficient	$NRC = 0.65$	$NRC = 0.65$

**TECHNICAL FEATURES**

<b>Sizes</b>	2430x160x16 mm.
<b>Tolerances</b>	Width: $\pm 1.5$ mm ; Length: $\pm 1.5$ mm.
<b>Perforation</b>	5.74%
<b>Finishing</b>	Melamine, wood veneer or lacquered (RAL, Pantone or NCS).
<b>Water-resistant</b>	Ask for properties.
<b>Absorptive Core</b>	0.25 mm black acoustic fleece attached to the back.
<b>Fire-rated</b>	UNE 13501: B-s2,d0


\*Ask for other finishes or sizes.

**ADDITIONAL FEATURES**

<b>Washable Product</b>	Clean with a damp cloth. Do not use chemical agents.
<b>Impact Resistance</b>	Depends on the support material.
<b>Scratching Resistance</b>	Depends on the finishing material.
<b>Dirt Proof</b>	High resistance to dirt. May vary with the finishing material.
<b>Recyclable</b>	Environmentally friendly.
<b>Earthquake-resistant</b>	Possible to install an anti-seismic system.

**INSTALLATION STANDARD SYSTEM**

**Walls & Suspended ceilings**

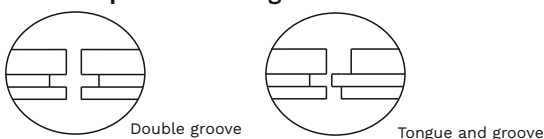

**PRODUCT REMARKS**

The goods should be stored in the jobsite at least 24h prior to the installation. The temperature must be between 18° and 25° and the relative humidity between 40% and 60%.