


Technical data sheet

SLATS LAMAS

Ideawood


DESCRIPTION

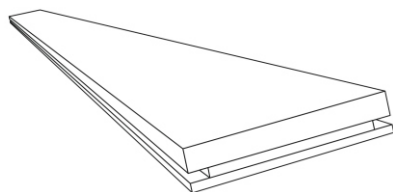

Solid wood modules with measures defined by the customer.



ACOUSTIC TEST

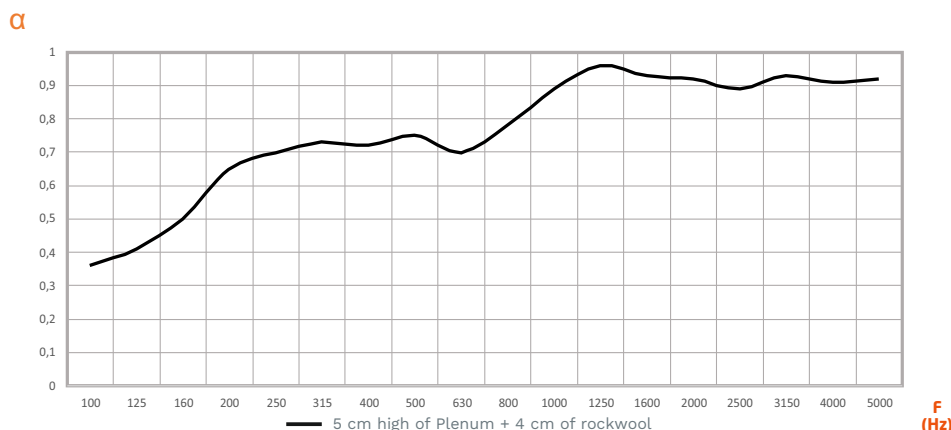

STUDIED DATA

Sizes: 1190x100 mm

Thickness: 22 mm

Weight: 2.70 kg

Density: 490 kg/m³



Test Sample.

Medium absorptive coefficient

$$\alpha_m = 0.45$$

Average absorptive coefficient

$$\alpha_w = 0.40$$

Noise reduction coefficient

$$\text{NRC} = 0.45$$


TECHNICAL FEATURES

Sizes	2380x100x22 mm
Tolerances	Width: ± 1.5 mm ; Length: ± 1.5 mm.
Finishing material	Lacquered pinewood (natural or stained lacquered). Other: contact us. Ask for properties.
Water-resistant	
Absorptive Core	Acoustic fleece between the product grooves.
Fire-rated	UNE 13501: B-s2,d0 Autoclave treatment.

*Ask for other finishes or sizes.

INSTALLATION STANDARD SYSTEM

Walls & Suspended Ceilings



Double groove

ADDITIONAL FEATURES

Washable Product	Clean with a damp cloth. Do not use chemical agents.
Impact Resistance	Depends on the support material.
Scratching Resistance	Depends on the finishing material.
Dirt Proof	High resistance to dirt. May vary with the finishing material.
Recyclable	Environmentally friendly.
Earthquake-resistant	Possible to install an anti-seismic system.

PRODUCT REMARKS

The goods should be stored in the jobsite at least 24h prior to the installation. The temperature must be between 18° and 25° and the relative humidity between 40% and 60%.