



WC partition system cronus




KEMMLIT For every requirement

As a market-leading company for sanitary and individual facility furnishings, KEMMLIT offers a wide range of high-quality solutions, from WC cubicle systems to lockers and storage compartments to complete changing room airlocks for cleanrooms.

What we do is based on a clear commitment to the highest quality in products, consulting, and installation. What distinguishes us is qualified know-how, state-of-the-art manufacturing techniques, and innovative design.

For this, we have in recent years received numerous awards and distinctions. What can we do for you?

**More at: www.kemmlit.de/cronus
As of 02/2025**

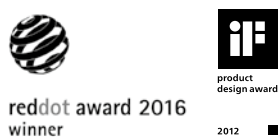


cronus Overview

KEMMLIT For Every Requirement	2
cronus Partition System	4
cronus Sustainable	6
cronus Standard	7
cronus Space-Optimized	8
cronus Changing Cubicles	9
cronus Glass	12
cronus Features	13
cronus NR Details	14
cronus Planning Aid	16
KEMMLIT Online Shop	20
cronus Color Concept	21
Quality Made in Germany	22
KEMMLIT Our Promise	23



kemmlit.de

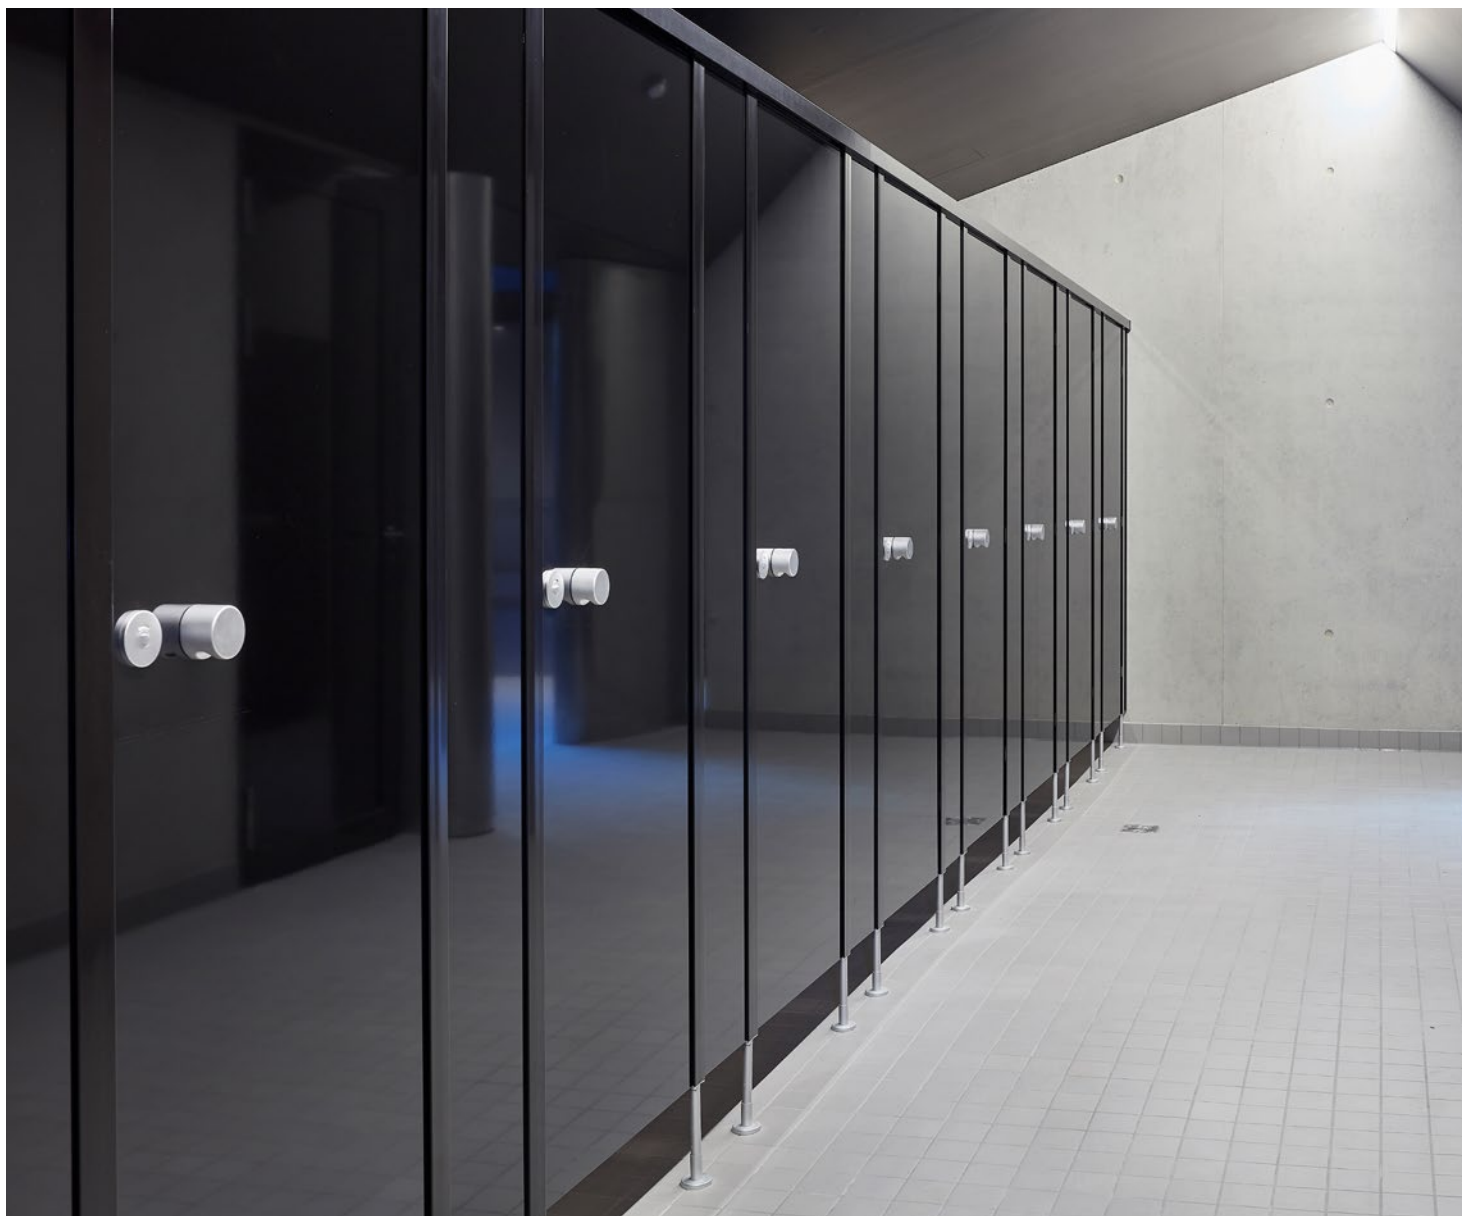

cronus special edition; walls, doors and profiles in black

cronus cubicle system

cronus is the cubicle system that combines design, maximum robustness and greatest possible flexibility. Door and wall elements consist of 13 mm thick water-resistant HPL-solid core panels with linear profiles made of anodised aluminium. In addition to the colour decorative layer, a special overlay protects against wear, abrasion

and scratches. cronus is suitable for wet, damp and dry rooms.

Thanks to its intelligent design, cronus can be flexibly realised according to individual needs. Thus, cronus can be used not only as a WC cubicle but also as a changing cubicle or shower partition.

All construction details are designed for a high-

quality appearance and years of trouble-free function.

As an alternative to HPL, there is the high-quality cronus glass solution made of 12 mm toughened safety glass for front and side walls, as well as 8 mm toughened safety glass for the intermediate walls and doors. cronus Glass is ideal for demanding



cronus with anti-finger trap protection

Building owners, designers and planners who want to combine the advantages of glass with the stability and durability of cronus. wollen. cronus offers, like all KEMMLIT WC cubicle systems, the 7-year KEMMLIT guarantee.



Extremely robust



Versatile



Price-Performance-Tip



cronus erfüllt die Anforderungen nach DGNB

cronus Nachhaltig

cronus erfüllt die Anforderungen nach **DGNB** und trägt nicht nur zur Nachhaltigkeit bei, sondern auch zu Ihrer Gebäudezertifizierung: Die Deutsche Gesellschaft für Nachhaltiges Bauen e. V., ist ein Zertifizierungssystem für nachhaltiges und wirtschaftlich effizientes Bauen in Deutschland.

Es dient der objektiven Beschreibung und Bewertung der Nachhaltigkeit von Gebäuden und Stadtquartieren. Entscheidend ist, das DGNB System nie einzelne Maßnahmen bewertet, sondern immer die Gesamtpformance eines Gebäudes bzw. Stadtquartiers. Darüber hinaus ist KEMMLIT nach **DIN EN ISO 14001**

zertifiziert und setzt damit Schwerpunkte im Bereich Umweltmanagement. Die ISO 14001 Norm legt Anforderungen an ein Umweltmanagement fest, mit dem ein Unternehmen seine Umweltleistung verbessern, rechtliche und sonstige Verpflichtungen erfüllen und Umweltziele erreichen kann.






cronus mit Füßen und Stabilisator in der Vorderfront und mit Fingerklemmschutz, in Hellgrau 7208

cronus Standard

In the standard solution, cronus is equipped with feet and a stabilizer in the front panel. provided. The floor clearance is 150 mm with an adjustment range of -5/+25 mm for the best possible adaptation to floor slopes. The feet are made of high-quality aluminum with a aluminum or nylon cover rosette.

They are connected to the floor and with the stable aluminum frame construction frictionally connected.

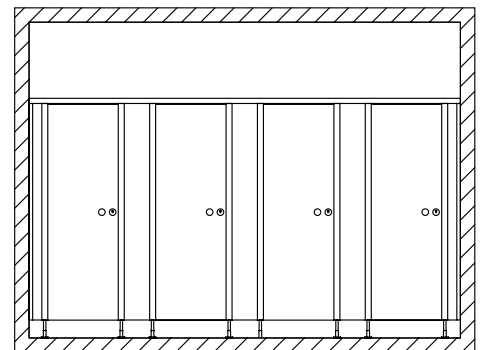




cronus stand-optimized with recessed feet, in Lime Green 6715

cronus Stand-optimized

Alternatively, cronus is available in the stand-optimized version, where the feet are located in the partition walls. Invisible to the observer, visually perfect and easy to clean.

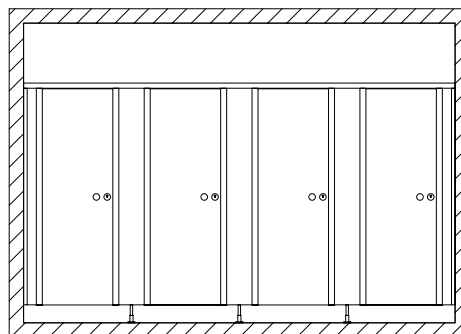



cronus Changing Cubicles with Under-Bench Central Locking System and Custom Digital Printing

cronus Changing Cubicles

cronus is ideally suited for dry, damp, and wet rooms. As shower or changing cubicles, as well as communal changing cubicles for outdoor pools, leisure or indoor pools, spa and rehabilitation facilities, for campsites and fitness studios. The changing-

cubicles are equipped with an integrated bench and central locking system for closing both cubicle doors.

The cubicles can, as desired, additionally be fitted with mirrors, storage consoles, or anti-climb protection.







cronus Glass with feet and stabilizer in the front panel, in White Green 6504

cronus Glass

The high-quality cronus Glass solution consists of 12 mm single-pane safety glass for front and side walls, as well as 8 mm single-pane safety glass for the intermediate walls and doors. The basis of this partition wall solution is the load-bearing construction made of anodized aluminum profiles for accommodating partition wall elements. The result is

an extremely stable and durable sanitary partition wall made of genuine glass. cronus Glass can be realized as a WC partition wall, changing cubicle or shower partition.

On request, it is possible to implement the partition wall system as a combination with HPL and glass elements.



Urinal partitions made of HPL



Toilet roll holders made of aluminum



Door stopper hooks made of stainless steel

cronus Features

Urinal partitions and privacy screens are increasingly being planned for sanitary and restroom facilities. In addition to hygiene, privacy plays a particularly important role. Here too, cronus offers individual solutions. Upon request, the urinal partitions and privacy screens can be realized in special widths and special heights, with or without feet.

With our extensive range of accessories such as e.g., toilet roll holders or door stopper hooks, the cronus WC cubicle can be fully equipped. The sanitary accessories are optionally available in stainless steel, aluminum, or nylon. Theft-proof screwed and coordinated in color and design. The placement of accessories is already taken into account during the overall planning.





Door interior: Aluminum lock case with FeelSafe indicator



Door exterior: Aluminum pull knob with viewing window



Three-roller aluminum edge hinge with stainless steel axle

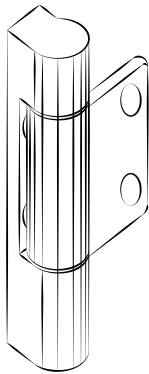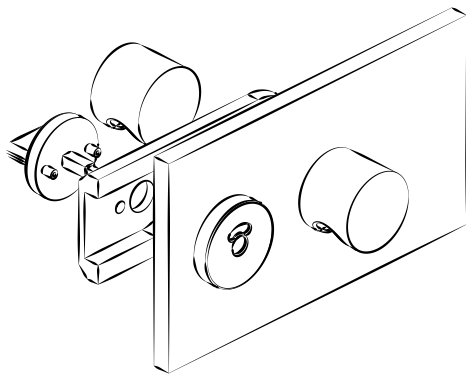

cronus NR Details

- Your advantages:**
- Lock case made of high-quality aluminum
 - Metal WC lock, wear-free and durable
 - The lock is very stable, non-flammable, and corrosion-resistant
 - Pull knobs in nylon, aluminum, or stainless steel
 - Additionally, our vacant/occupied indicator on the cubicle interior (FeelSafe) gives you a feeling of security

- Your advantages:**
- The doors cannot be unhinged
 - Maintenance-free bearings
 - Vandal-proof
 - High stability
 - Very durable
 - Non-flammable
 - Self-closing/ -opening






Anti-finger-trap protection with integrated hinges



Aluminum foot in the front
in static connection with the profiles



Wall connection profile with rosette for a precise
joint pattern

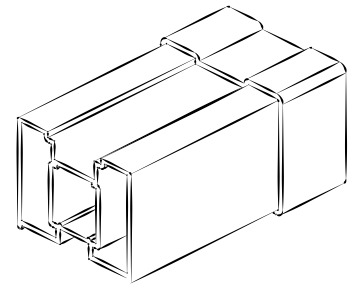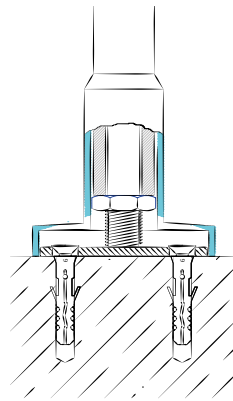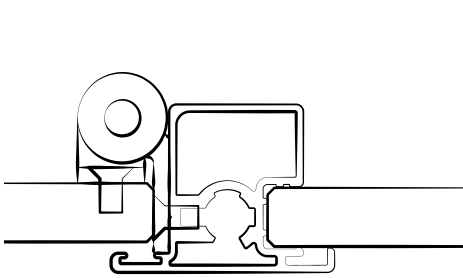

Your benefits:

- The doors cannot be un-hinged
- Prevents the trapping of fingers
- Vandal-proof
- Maintenance-free

Your benefits:

- With solid stainless steel foot-plate
- Secured with multiple screws
- Outstanding stability and longevity through static connection with M12 bolting
- 100% rust-free

Your benefits:

- Attractive design
- Durable stability through three-chamber profile
- No visible joints due to stabilizer rosette







cronus comfort, stability-optimized with recessed feet in light grey

cronus comfort

The WC partition system cronus comfort was specially developed for increased accessibility requirements in confined spaces. The system reduces space requirements by over 20% with the same passage width of the WC cubicle compared to conventional partition constructions. This allows for more cubicles with simultaneously wide passage dimensions.

Make the best possible use of your room dimensions with cronus comfort while complying with legal provisions for barrier-free sanitary rooms. We would be happy to advise you individually on your room concept. cronus comfort is ideally suited for wet, damp, and dry rooms. Door and wall elements of the partition consist of 13 mm thick water-resistant HPL solid core panels.

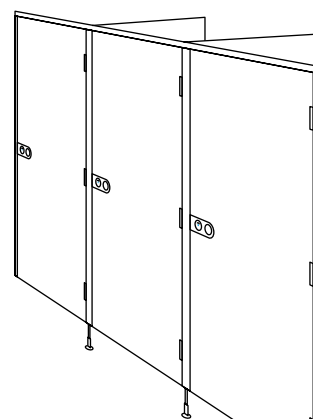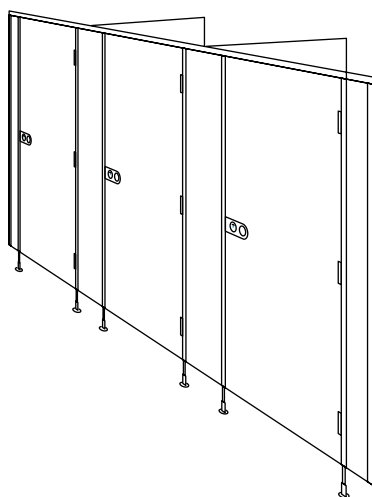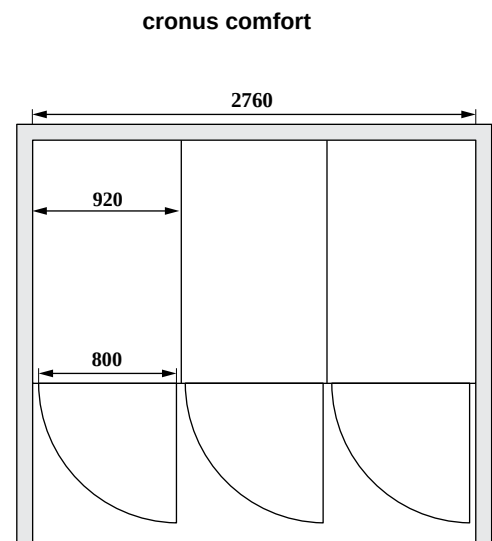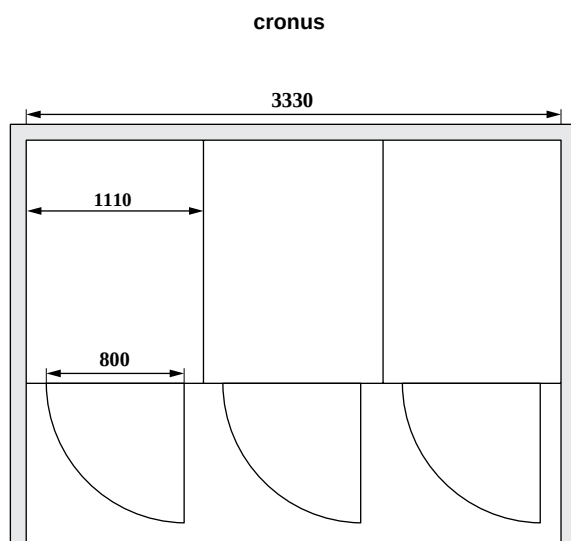

Compact solution, full comfort

Reduced space requirement by more than 20% with consistent door passage width for more efficient space utilization.

cronus NR Planning Aid



Partition Wall System	cronus NR (Wet Room)	Alternatively at extra cost
Floor Plan	Row installations and transverse cubicles, any room situation	Optimized support design (feet set back in partition wall, stabilizer above the front max. front wall width (axis) > 250 mm, a support leg is required beyond this For plasterboard wall with inserts/ support leg required Special solutions possible
System Height	2000 mm including 150 mm floor clearance	2135 mm including 150 mm floor clearance Special heights possible (from 2135 mm with top panel)
Floor Clearance	Standard 150 mm, adjustment range -5 mm / +25 mm	Special dimensions possible possible without floor clearance
Cubicle Depth	1500 mm	Special depths possible (from 1600 mm with joint, stabilizer, H-profile and foot in the partition wall)
Wall Material	13 mm HPL solid core panel with decorative layer	
Door Material	13 mm HPL solid core panel with decorative layer	Alternatively 8 mm ESG glass or 30 mm aluminum composite element max. door leaf height 2100 mm
Door Stop	Multi-chamber aluminum profile with continuous damping rubber for noise reduction	
Door Width	570 mm / 640 mm / 750 mm / 980 mm (nominal dimensions)	Special widths possible
Swing Doors		13 mm HPL with stainless steel pivot hinge Dimensions min. W x H 250 x 600 mm, max. W x H 600 x 1400 mm
Stabilizer	Three-chamber profile, dimensions W x H 54 x 43 mm in angular design	
Wall Connection	Aluminum U-rail for straight wall connection	
Corner Connection for Corner Cubicle	Corner connection profile made of aluminum	
Angled Wall Connection		Aluminum U-rail for angled wall connection
Wall Offset		Made of aluminum profiles with U-rail
Top Panel		13 mm HPL max. W x H 1800 x 650 mm, larger widths are joined
Transom Window		Aluminum frame with clear ESG glass 6 mm, Alternatively acrylic glass 5 mm, max W x H 1800 x 650 mm, larger widths with joint

Partition wall system:	cronus NR (Wet room)	Alternatively at extra cost
Free-hanging System		Aluminum support system powder-coated 50 x 150 mm (max. span without support 3600 mm) alternatively aluminum support system powder-coated 50 x 200 mm (max. span without support 4500 mm)
Feet/ Floor connection	Anodized aluminum foot with stainless steel base plate and aluminum or nylon cover rosette, 150 mm floor clearance, continuously adjustable	Stainless steel foot with stainless steel rosette Adhesive feet (from 80 mm floor clearance), not possible with optimized stability without floor clearance only for antechamber door
Hinges	Three-roller edge hinge made of aluminum (hinge- roller Ø 20 mm), non-removable with integrated spring - optionally for self-closing or self-opening of the door, 3 hinges per door	
Finger pinch protection		Aluminum safety tube on hinge side
Pull knobs/ One-hand locking mechanism	Lock case made of aluminum or powder-coated with door knob made of nylon, with WC locking mechanism	Door knob made of aluminum or stainless steel One-hand locking mechanism made of aluminum
Handles		Aluminum lock case with door handle made of aluminum, stainless steel or nylon Profile cylinder locking possible
Locks	1-bolt lock	1-bolt profile cylinder lock 2-bolt lock 2-bolt profile cylinder lock
Central locking for changing cubicles		Under-bench central locking (UBZ) Overhead central locking (OLZ)
Engravings		Selection of standard symbols, numbers and texts individual graphics possible
Curtain rail		Aluminum sliding rail natural anodized (integrated in the stabilizer) White plastic curtain gliders and metal curtain hooks
Anti-climb protection		Natural anodized aluminum tubes Ø 30mm, axis 140 mm max. cubicle depth 1600 mm
Standard colors	according to KEMMLIT color chart	
Special colors		Special colors from all HPL manufacturers possible individual testing necessary longer delivery time
Digital print		individual digital prints possible
Test mark	TÜV-certified, GS tested safety	
Warranty	7-year KEMMLIT warranty	

Subject to technical changes 09/2023

cronus comfort Planning Aid



Partition System	cronus comfort	Optional, at extra cost
Floor plan	Row installations and transverse cubicles, any room situation	Optimized installation (feet set back in partition wall, stabilizer above the front) Combination with cronus NR possible Fastening to plasterboard walls only with inserts and only possible after technical inspection
System height	2000 mm including 150 mm floor clearance	2135 mm including 150 mm floor clearance Special heights possible
Floor clearance	Standard 150 mm, adjustment range -5 mm / +25 mm	Special dimensions possible
Cubicle depth	for outward-opening doors 1500 mm for inward-opening doors 1600 mm	individual depths possible (from 1600 mm with joint, stabilizer, H-profile and foot in the partition wall)
Wall material	13 mm HPL solid core panel with decorative layer	
Door material	13 mm HPL solid core panel with decorative layer	
Door stop	Multi-chamber aluminium profile with continuous damping rubber for noise reduction	
Door width	minimum 850 mm	Special widths possible
Clear opening	Standard: Door width minus 51 mm with finger pinch protection: Door width minus 33 mm	Opening angle max. 105°
Door opening angle	max. door opening angle 85 degrees for inward-opening doors or for doors abutting external walls	
Stabilizer	Three-chamber profile, dimensions W x H 54 x 43 mm in angular design	
Wall connection	Aluminium U-channel for straight wall connection	
Corner connection for Corner cubicle	Corner connection profile made of aluminium	
Slanted Wall connection		Aluminium U-channel for slanted wall connection
Wall bend		Made of aluminium profiles with U-channel
Cantilevered system	not possible	
Partition wall	recommended partition wall depth min. 1500 mm for inward-opening door	

Cubicle System		cronus comfort	Optional, at extra cost
Feet / Floor Connection	Anodized	aluminum foot with stainless steel base plate and Aluminum or nylon cover rosette, 150 mm Ground clearance, continuously adjustable	Stainless steel foot with stainless steel rosette Adhesive feet (from 80 mm ground clearance), not possible with optimized stability
Hinges		Three-roller edge hinge made of aluminum (hinge roller Ø 20 mm), non-detachable with integrated spring - optionally for self-closing or self-opening door, 3 hinges per door	
Anti-finger trap protection			Aluminum safety tube on the hinge side
Pull knobs / One-hand locking mechanism		Lock case made of aluminum or powder-coated Door knob made of with nylon door knob, with WC lock	aluminum or stainless steel One-hand locking mechanism made of aluminum
Levers			Lock case made of aluminum with door lever made of aluminum, stainless steel or nylon Profile cylinder locking possible
Locks		Single-bolt lock	Single-bolt profile cylinder lock Double-bolt lock Double-bolt profile cylinder lock
Central locking Not possible for changing cubicles		for changing cubicles	
Engravings			Selection of standard symbols, numbers and texts individual graphics possible
Anti-climb protection			Natural anodized aluminum tubes Ø 30mm, axis 140 mm max. cubicle depth 1600 mm
Standard colors		according to KEMMLIT color chart	
Special colors			Special colors from all HPL manufacturers possible individual testing required, longer delivery time
Digital printing			individual digital prints possible
Certifications		TÜV certified, GS tested for safety	
Warranty		7-year KEMMLIT warranty	

Subject to technical modifications 02/2025



Dyson Wash+Dry hand dryer, faucet and hand dryer in one

KEMMLIT Online Shop

In the KEMMLIT online shop, not only sanitary accessories for self-assembly can be reordered. Further complementary products related to sanitary facilities, such as hand dryers, changing tables, diaper pails, door symbols, and consumables can be conveniently and bought online around the clock. If you have any questions, our friendly employees from the online shop team are available via live chat or by phone.






You can pay easily and quickly with a payment method of your choice, including: invoice purchase, prepayment, PayPal, direct debit, or credit card. Our delivery time is approx. 2-3 working days within Germany. Enjoy your shopping!

More at: shop.kemmlit.de



cronus Color Concept

cronus impresses with a wide variety of colors and **combination options**. The selection is almost limitless.
Special **colors and individual digital prints are also** available upon request at any time.


Walls and doors made of HPL:

			
Traffic White 9317 similar to NCS S 0502-G50Y	Granite White 9317	Light Grey 7208 similar to NCS S 2500-N	Quartz Grey 7708 similar to NCS S 5000-N
			
Lagoon Blue 5408 similar to NCS S 1030-R90B	Pacific Blue 5715 similar to NCS S 2060-R90B	Graphite 7808 similar to NCS S 7502-B	Black 0080
			
Lime Green 6715 similar to NCS S 1060-G60Y	Maize Yellow 1708 similar to NCS S 1070-Y10R	Orange 2717 similar to NCS S 0570-Y40R	Garnet Red 3708 similar to NCS S 3060-R
			
Silver 7408	Cappuccino 1117 similar to NCS S 3010-Y60R	Natural Oak 01171	Rustic Spruce 02171

Walls and doors made of ESG glass:

				
Pale Brown 8117 similar to RAL 8025	Deep Black 7613 similar to RAL 9005	Sulphur Yellow 1817 similar to RAL 1016	Traffic Orange 2317 similar to RAL 2009	Raspberry Red 3417 similar to RAL 3027
				
Traffic White 9317 similar to RAL 9016	White Green 6504 similar to RAL 6019	Anthracite Grey 7117 similar to RAL 7016	Basalt Grey 7217 similar to RAL 7012	Cappuccino 1117 similar to RAL 1019
				
Azure Blue 5517 similar to RAL 5009	Structure SR 2002			


Profiles, hinges, fittings, feet and accessories:

				
White 02 2 similar to RAL 9016	Manhattan 05 4 similar to NCS 2801-Y36R	Anthracite 03 4 similar to RAL 7043	Dark Blue 04 4 similar to RAL 5003	Red 11 4 similar to RAL 3003
			Color concept valid from 01/2025	
Yellow 10 4 similar to RAL 1023	Natural Anodized 08 similar to E6/EV1	Stainless steel V2A 12 5		

- 1 At extra cost
- 2 Also available at extra cost in optiwhite (decolorized glass)
- 3 Ornamental glass, translucent, only possible for doors
- 4 Profiles for glass systems only in Natural Anodized 08
- 5 Only for accessories and feet

Please note that the color variations shown may differ slightly from the original due to printing technology. We would be happy to advise you personally.

Quality Made in Germany

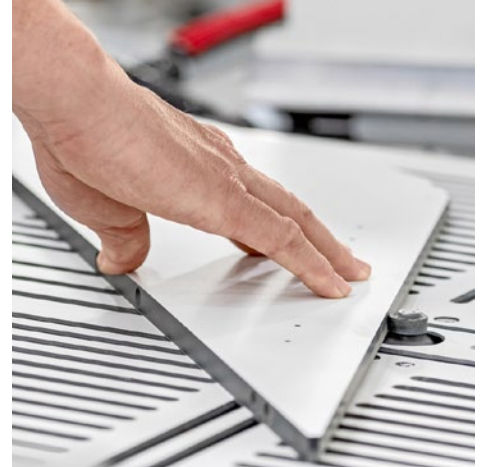

Experience is irreplaceable!

For more than 50 years, we have been realizing over 9,000 projects annually in the commercial, public, and private sectors. Using one of the most modern machine parks in the industry, we manufacture your individual KEMMLIT product, which also

in the factory and in all departments undergoes consistent quality control. Because quality is KEMMLIT's highest priority. We produce exclusively in Germany. Therefore, we are proud of our machine park and

our well-trained specialist personnel. With our fleet, we deliver your product on time to the agreed date at the construction site. There, it is installed by our trained specialist fitters.

KEMMLIT Our Promise



ON-TIME INSTALLATION

More than 98% of our orders are installed on time, as you requested.



FASTEST PRODUCTION

We install express orders nationwide within 10 working days.




IMMEDIATE REPAIR

We solve your problems within 5 working days.



HIGHEST QUALITY

High-quality components and materials are the guarantee for durable products made in Germany.

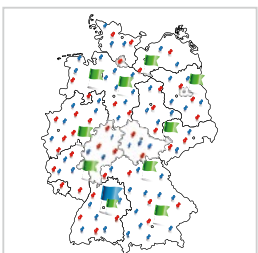

WE ARE IN YOUR VICINITY

More than 45 sales representatives and more than 80 installation teams work for you.



KEMMLIT-Bauelemente GmbH | Maltschachstraße 37 | D-72144 Dusslingen
Tel.: +49 (0) 7072 /1 31-0 | info@kemmlit.de | kemmlit.de